


FIW64 / FIW62

4-CH / 2-CH PCI Express® IEEE 1394b Frame Grabbers

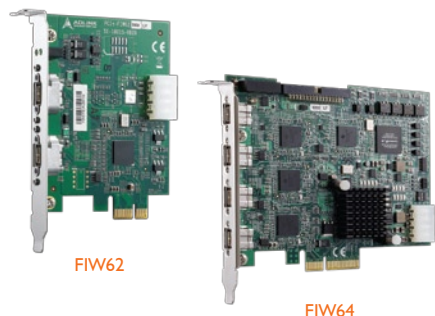

Introduction

The FIW64 / FIW62 are IEEE 1394b (FireWire 800) interface cards designed for high speed computer-based machine vision applications. The FIW64 / FIW62 support up to four 1394b (FireWire 800) ports for multiple 1394b device connections with data transfer rates up to 3.2 Gb/s, as found with most IEEE 1394b cameras.

The FIW64 / FIW62 provide four/two direct-connect IEEE 1394b connectors with a screw-lock mechanism. These screw-lock connectors provide a reliable connection between FIW64 / FIW62 and up to four IEEE 1394b cameras.

A 4-pin ATX power connector on the FIW64 / FIW62 support IEEE 1394b cameras that draw power directly from the frame grabbers. Each port has a green LED on the front panel that will illuminate when the FIW64 / FIW62 are connected to a IEEE 1394b camera for convenient identification of channel connection status.

The FIW64 provides four isolated digital inputs and outputs to connect to external devices such a position sensor. The FIW64 also includes four isolated programmable trigger output pulses to manage trigger events such as activating a strobe light.



Features

- Industrial screw lock connector
- Channel status LEDs
- Power supplied to the IEEE 1394b connectors

FIW64

- PCI Express® x4 compliant
- High-speed image transfer rates up to 3.2 Gbps
- Four isolated digital inputs/outputs
- Four isolated TTL level programmable trigger output pulses

FIW62

- PCI Express® x1 compliant
- High-speed image transfer rates up to 800 Mb/s

Applications

- Machine vision inspection systems
- Automatic optical inspection machineries
- Scientific research instrumentations
- Medical research instrumentations

Software Support

- Windows® Platform
 - Available for Windows® XP/Vista/7

Ordering Information

- **FIW64**
4-CH PCI Express® x4 IEEE 1394b interface card
- **FIW62**
2-CH PCI Express® x1 IEEE 1394b interface card

Accessories

Cabling

- **1394b Cable**
4.5 M IEEE 1394b 9-pin cable with screw-lock connector

Specifications

	FIW64	FIW62
■ Form Factor	PCI Express® x4 compliant	PCI Express® x1 compliant
■ IEEE 1394b Port	Fully support provisions of IEEE P1394b-2002 Fully compliant with provisions of IEEE std 1394-1995 for a high performance serial bus and IEEE std 1394a-2000	
■ Operating Environment	Temperature: 0°C to +55°C Humidity: 5% to 90%	
■ Storage Environment	Temperature: -20°C to +85°C Humidity: 0 to 95% RHNC	
■ Power Requirements	Four isolated digital inputs/outputs Four isolated trigger inputs/outputs	-
■ Digital and Trigger I/Os	+12 V max @ 0.2 A +3.3 V max @ 2.5 A	+3.3 V max @ 0.22 A Power provided to IEEE 1394 connection +12 V / per port, 1 A (over current protection)
■ Isolated Voltage	1000 V @ 60 seconds	-
■ Dimensions	129.5 mm x 111.15 mm (W x L)	78.6 mm x 111.15 mm (W x L)