

# EOS-2000


4-CH Analog Embedded Vision System with Intel® Core™ 2 Duo P8400 Processor




## Introduction

ADLINK's EOS-2000 is a rugged and compact vision system that features an Intel® Core™ 2 Duo P8400 processor and four channels for NTSC/PAL image acquisition. This system is ideal for high computing power and multi-camera imaging applications such as alignment, assembly inspection, and gauging.

By selecting long-life embedded components and incorporating system monitoring components to watch CPU temperature, fan speed, and system responsiveness, the EOS-2000 provides a very robust and reliable platform for mission critical applications.

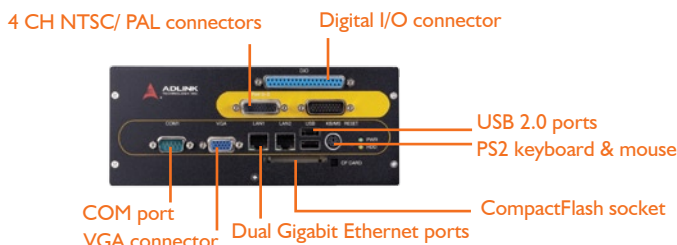

EOS-2000 Front View

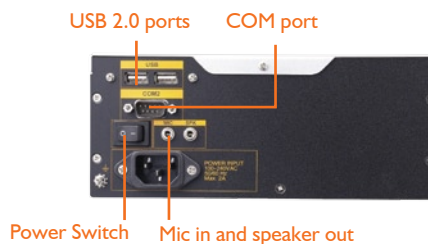

EOS-2000 Back View

## Features

- Compact and rugged system design
- Embedded Intel® Core™ 2 Duo P8400 CPU
- Multi-camera support: up to four NTSC/PAL cameras
- Rich I/O support: RS-232/485, USB, and isolated digital I/Os
- Dual storage support: HDD and CompactFlash cards
- Hardware monitoring: temperature, voltage, and watchdog timer

## Software Support

- Windows® 7/XP/XP Embedded

## Specifications

■ CPU	Intel® Core™ Duo P8400, 2.26 GHz
■ System Memory	Up to 4 GB DDR3
■ Camera Interface	4-CH NTSC/PAL
■ Chipset	Intel® GM45 / ICH9 chipset
■ VGA	Analog CRT support up to 1600 x 1200
■ USB	Four USB ports, USB 2.0 compliant
■ Audio	AC97, Mic In/Speaker Out
■ COM Ports	COM1/COM2:RS-232/RS-422/RS-485(BIOS Setting)
■ Digital I/O	16-CH isolated digital input and output, 5.0 KV isolation protection
■ Keyboard/Mouse	Combed PS/2 type mini-DIN connectors
■ Power Supply	DC: 10 to 30 Vdc, AT mode AC: 100 to 240 VAC, AT mode
■ Operating Temp.	0°C to 55°C
■ Humidity	0% to 90%
■ Dimensions	200 (W) x 165 (D) x 85 (H) mm (7.9" x 6.5" x 3.3")
■ Power Consumption	50 W (with 2 GB DDRAM and 2GB CompactFlash)
■ Storage	On-board SATA port for 2.5" HDD/SSD installation 1 type I CF socket, supporting PIO and DMA modes
■ Random Vibration	Operating: 5 to 100 Hz, 0.00142 g2/Hz; 100 to 500 Hz, -6 dB/Octave, 0.5 Grms, 3 axes, 30 minutes/axis
■ Safety compliance	CE/FCC, RoHS

## Ordering Information

- **EOS-2000**  
4-CH Analog Embedded Vision System with Intel® Core™ 2 Duo P8400 Processor

## Optional Accessories

- **4 GB DDR3 upgrade**  
Upgrade to 4 GB DDR3 memory
- **160 GB HDD option**  
Factory-installation of 160 GB SATA hard disk drive (0 to 60°C)
- **8 GB / 40 GB SSD option**  
Factory-installation of 8 GB / 40 GB SATA solid state disk (0 to 70°C)

1

Software & Utilities

2

DAQ

3

PXI

4

Modular Instruments

5

GPIB & Bus Expansion

6

Motion Control

7

Real-time Distributed I/O

8

PAC

9

Remote I/O

10

Communications

11

Vision

12

Fanless Embedded Computers

13

cPCI & Industrial Computers